

HOT ROLLED SHEETS

STENA STÅL AB





PROGRAMME INFORMATION

Programme:	The International EPD® System			
	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden			
	www.environdec.com info@environdec.com			
CEN STANDARD EN 15804:2012+A1:2013 SERVEI	O AS THE CORE PCR			
Product category rules (PCR):	PCR 2012:01 Construction products and construction services, version 2.33			
PCR review was conducted by:	The Technical Committee of the International EPD® System. Chair: Massimo Marino. Contact via info@environdec.com			
Independent third-party verification of the declaration and data, according to ISO 14025:2006:	EPD process certification FPD verification			
Third party verifier:	Håkan Stripple, IVL Swedish Environmental Research Institute			
	Holean Stripple			
Approved by:	The International EPD® System			
Procedure for follow-up of data during EPD validity involves third party verifier:	Yes ✓ No			

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804:2012+A1:2013.





COMPANY INFORMATION

Stena Stål supplies a wide range of steel products to customers in Sweden and Norway. Through close collaborations with leading steel producers, products including Beams, Merchant bars, Tubes/Hollow sections, Reinforcement steel, Strip products and heavy plates, Stainless steel, Aluminium, and special steels are offered. Its customers mainly consist of small and medium-sized companies in the construction and industrial sectors.

As a complement to its wholesale business, it offers the adaptation and pre-treatment of steel products, based on customer-specific needs, either in-house or in collaboration with its partners. Among other services, cutting, abrasive blasting and painting is also offered.

Stena Stål has operations in 15 locations in Sweden and in Moss, Norway, comprising warehouse, production and sales. Stena Stål is a part of the Stena Metall Group.

Stena Stål's organization maintain ISO 9001, ISO 14001, ISO 45001 and SS-EN1090 certificates. Stena Stål also provides a number of product certificates and declarations to ensure fulfilment with applicable regulations and standards, for more information:

https://www.stenastal.se/hallbarhet/

For additional information, please visit the company web site: www.stenastal.se/

Contact information: Stena Stål AB, Box 4088,

400 40 Göteborg, Sweden;

Telephone: +46 (0) 10 445 00 00

PRODUCT INFORMATION

Product name: Hot Rolled shee

Product identification: Material Standards

EN 10025 and EN 10149

<u>Product description:</u> Hot Rolled material in sheets supplied from Stena Stål's Swedish facilities. The EPD cover the following products:

Hot Rolled 235/240 JR+AR

Hot Rolled 355J2+N

Hot Rolled Tear/Checker plate

Hot Rolled S355MC

Hot Rolled S420MC

Hot Rolled S650MC Hot Rolled Corten plate

The EPD covers both untreated sheets, as well as sheets that has been pickled to remove impurities at the surface. The thickness of the untreated hot rolled sheets range from 1.5 to 20 mm, while the pickled hot-rolled sheets are usually supplied in the thickness range 1.5-15 mm

Hot rolled sheets are one of the fundamental types of products that can be used for a variety of purposes and are readily bent, shaped or cut according to specifications.

The sheets are used in a variety of industries such as construction and automotive.

UN CPC code: 412

Geographical scope: Sweder





LCA INFORMATION

The underlying Life Cycle Assessment (LCA) has been conducted in accordance with ISO 14040 and ISO 14044. The study is also performed according to PCR 2012:01 Construction products and construction services, version 2.33; EN15804:2012+A1:2013, and General Programme Instructions for the international EPD® System, version 2.5.

<u>Declared unit:</u> 1 metric tonne steel delivered to customer from Stena Stål's Warehouses in Sweden

<u>Reference service life:</u> Not applicable for an A1-A4 assessment.

<u>Time representativeness:</u> The specific data for Stena Stål has been collected for the year August 2019 to September 2020. Background data are less than 10 years old.

<u>Database and LCA software used:</u> Modelling and environmental impact calculations are performed with the LCA software GaBi (version 9.2.1.68), using life cycle inventory data from supplier specific EPDs, GaBi Professional database 2020, GaBi Extension database XIV: construction materials 2020 and Ecoinvent 3.6.

<u>System boundaries:</u> The LCA is a cradle-to-customer's gate assessment covering the modules A1-A4.

Prod	uction s	stage	Constr	uction s stage	Use stage			End-of-life stage			age	Benefits and loads beyond the system boundaries				
Raw material supply	Transport	Manufacturing	Transport	Construction	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential
A1	A2	АЗ	A4	A5	B1	B2	В3	B4	В5	В6	В7	C1	C2	C3	C4	D
X	Χ	Χ	Χ	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND

X = Included MND = Module Not Declared

Figure 2. Description of the modules covered in the EPD

Figure 3 below is a simplified process chart with system boundaries where all processes in the figure are included in the assessment. Excluded are thus; infrastructure, construction, production equipment, and tools that are not directly consumed in the production process, travelling by personnel and research and development – all in accordance with the PCR.





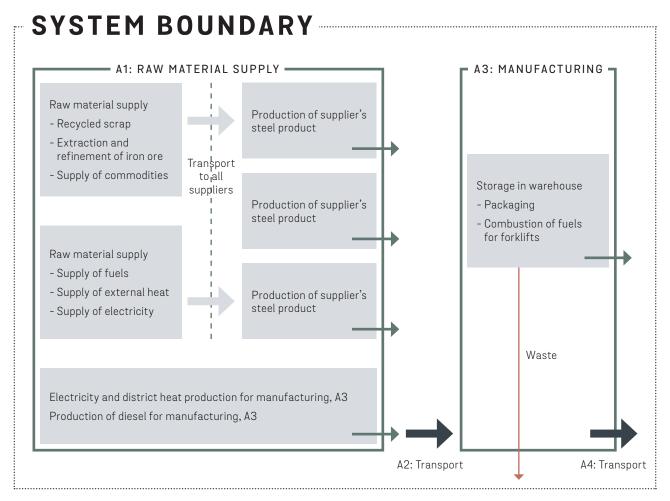


Figure 3. Simplified process tree.

THE LIFECYCLE IS DIVIDED INTO THE FOLLOWING MODULES:

Module A1: The upstream processes in A1 comprises the production of the hot rolled sheets at Stena Stål's suppliers. These has to a large extent been modelled with EPDs for the specific product and supplier in question. Generic LCA data were used in the case where supplier specific EPDs were lacking. The module also includes the production of purchased electricity and district heating used at Stena Stål's Warehouses.

<u>Module A2:</u> The upstream process in module A2 comprises impacts from transportation of the products to Stena Stål's Warehouses in Sweden.

<u>Module A3:</u> The core process, module A3, includes storage of the final products, use of fuels on site, as well as end-of-life treatment of waste generated at the warehouse (for example damaged products during transport and storage).

Module A4: The downstream process in module A4 comprises impacts from transportation of the products from Stena Stål' clients to the clients in Sweden. The transport is conducted with trucks, Euro 5, with an average transport distance of 375 km, one way, and a load factor of 50%. The load factor is set to take into account a partly empty return trip.

Cut-off and allocation principles:

Several products are stored at the Ware-houses and the environmental impact at the site (energy use, generation of waste and emissions to air) have been allocated to the production based on weight.

In case of recycling or other recovery of generated waste, impacts are borne by the product until the waste enters the facility gate where the recycling process takes place, which is in accordance with the Polluter Pays Principle. The same method is applied for incoming raw materials of recycled origin, where the product carries the burden related to producing the raw material from the recycled material, but not the upstream production of the virgin material.

All major raw materials and all the essential energy is included. The requirement that a minimum of 95 % of the total inflows (mass and energy) shall be included is fulfilled.





CONTENT DECLARATION

PRODUCT

The products consist of 100 % steel.

The products does not contain any of the substances listed on the "Candidate List of Substances of Very High Concern (SVHC) for authorisation" (http://echa.europa.eu/chem_data/authorisation_process/candidate_list_table_en.asp).

PACKAGING

The products are loaded on reusable wooden and plastic pallets.

RECYCLED MATERIAL

The product consists mainly of primary steel, with addition of some scrap in the production process at Stena Stål's suppliers.

The steel in the product can be fully recycled in the end-of-life.





ENVIRONMENTAL PERFORMANCE

POTENTIAL ENVIRONMENTAL IMPACT

Environmental impacts per [1 metric tonne hot rolled sheets delivered to customer from Stena Stål's warehouse]							
Parameter	Unit	A1-A3	A4				
GWP	[kg CO ₂ -eq.]	2.23E+03	3.24E+01				
ODP	[kg CFC11-eq.]	9.24E-10	8.04E-15				
AP	[kg SO ₂ -eq.]	4.03E+00	7.80E-02				
EP	[kg PO ₄ 3eq.]	4.44E-01	1.84E-02				
POCP	[kg ethene-eq.]	4.69E-01	-2.66E-02				
ADPE	[kg Sb-eq.]	1.06E-03	2.66E-06				
ADPF	[MJ]	2.34E+04	4.38E+02				
Caption	GWP = Global warming potential; ODP = Ozone depletion potential; AP = Acidification potential of soil and water; EP = Eutrophication potential; POCP = Photochemical ozone creation potential; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources						

USE OF RESOURCES

Resource use per [1 metric tonne hot rolled sheets delivered to customer from Stena Stål's warehouse]							
Parameter	Unit	A1-A3	A4				
PERE	[M]	8.57E+02	2.54E+01				
PERM	[M]	0.00E+00	0.00E+00				
PERT	[M]	8.57E+02	2.54E+01				
PENRE	[MJ]	2.38E+04	4.40E+02				
PENRM	[M]	0.00E+00	0.00E+00				
PENRT	[M]	2.38E+04	4.40E+02				
SM	[kg]	4.30E+01	0.00E+00				
RSF	[MJ]	6.45E-20	0.00E+00				
NRSF	[M]	7.57E-19	0.00E+00				
FW	[m³]	1.02E+01	2.96E-02				
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water						





WASTE PRODUCTION AND OUTPUT FLOWS

WASTE PRODUCTION AND OUTPUT FLOWS

Waste categories and output flows per [1 metric tonne hot rolled sheets delivered to customer from Stena Stål's warehouse]								
Parameter	Unit	A1-A3	A4					
HWD	[kg]	2.32E+00	2.04E-05					
NHWD	[kg]	4.43E+01	6.98E-02					
RWD	[kg]	1.59E-01	8.12E-04					
CRU	[kg]	0.00E+00	0.00E+00					
MFR	[kg]	2.01E+00	0.00E+00					
MER	[kg]	2.29E+00	0.00E+00					
EEE	[M]	0.00E+00	0.00E+00					
EET	[MJ]	0.00E+00	0.00E+00					
Caption	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy							





REFERENCES

PCR 2012:01 Construction products and construction services, version 2.33

EN15804:2012+A1:2013 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

General Programme Instructions of the International EPD® System. Version 2.5.

ISO 14025:2010 on Type III Environmental declarations.

ISO 14040:2006 and ISO 14044:2006 on Life Cycle Assessments (LCA).

Tollin, S., and Silfverstrand, N. 2020. LCA report for Stena Stål steel products, Ramboll, 2020

CONTACT INFORMATION:



EPD OWNER:

Stena Stål AB

Box 4088, 400 40 Göteborg, Sweden Telephone: +46 (0) 10 445 00 00

Marina Gasparius,

marina.gasparius@stenastal.se



LCA/EPD AUTHOR:

Ramboll Sweden AB

Box 5343, Vädursgatan 6, 402 27 Göteborg, Sweden

Sara Tollin,

sara.tollin@ramboll.se

Niclas Silfverstrand,

niclas.silfverstrand@ramboll.se

David Althoff Palm,

david.palm@ramboll.se



PROGRAMME OPERATOR:

EPD International AB info@environdec.com

